






SCAT | SCEET HOSES



Material meets CS/FAR 25.853(a) DIN EN 45545-2 TO1/EN ISO 4589-2 min HL3




Industrial rubber MANUFACTUR

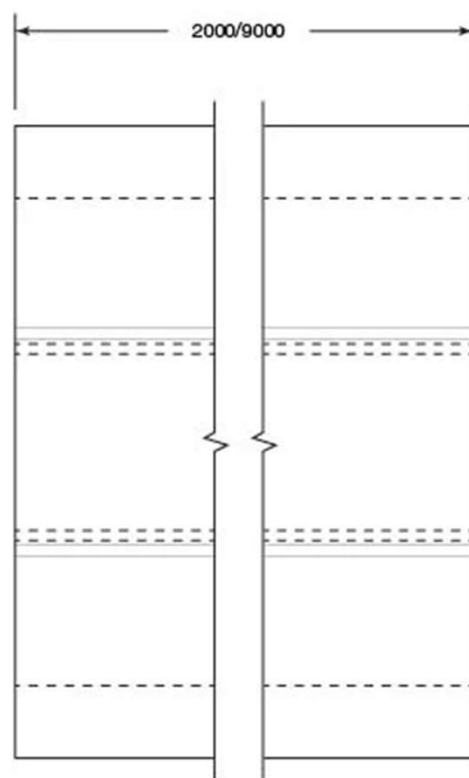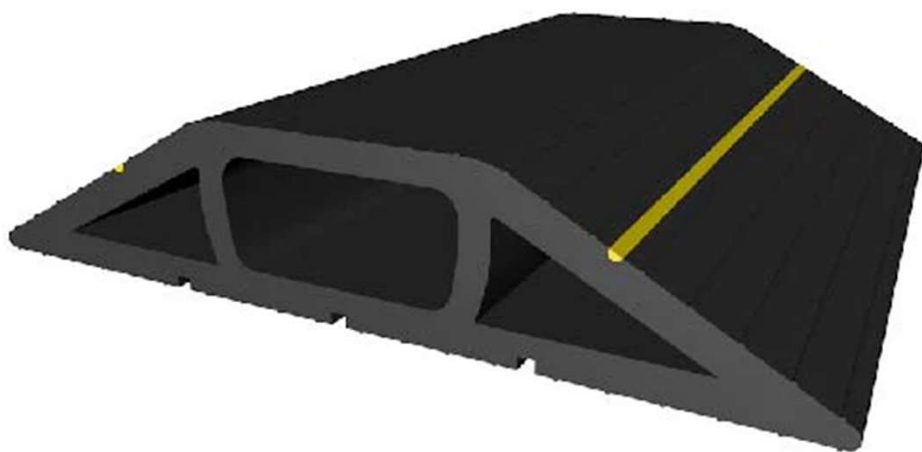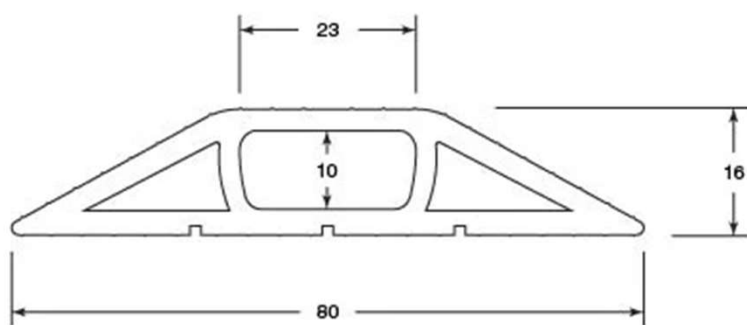

Material meets CS/FAR 25.853(a) DIN EN 45545-2 TO1/EN ISO 4589-2 min HL3



AIRSTARTHOS

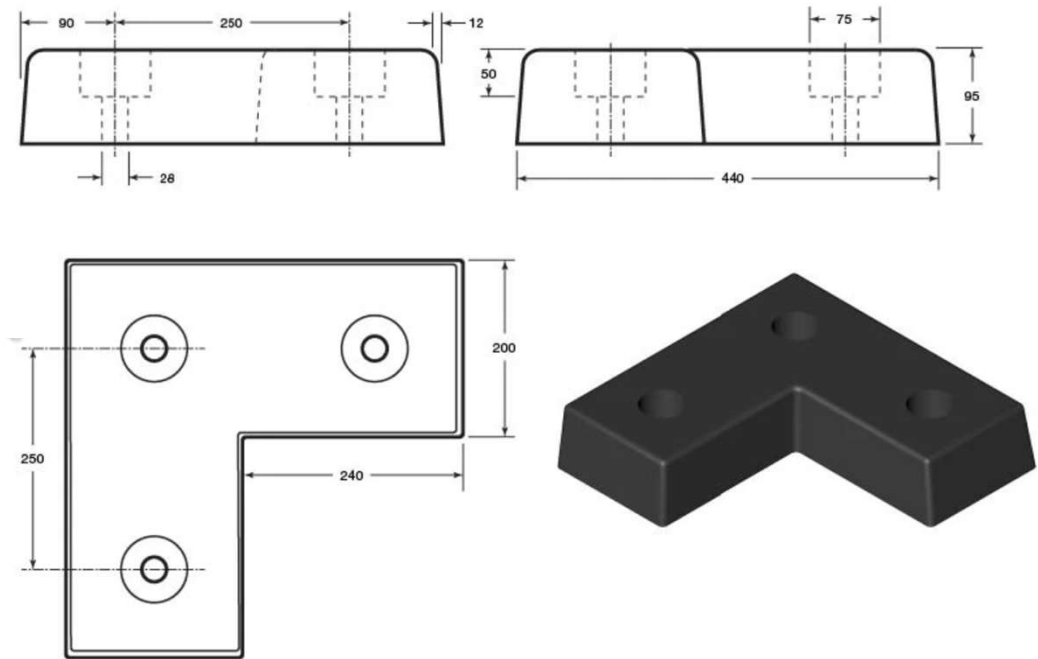

PROPERTIES

12 kg.

ASH-BD1 "L" shaped bumper provides extra protection along the top edge of the loading dock.
Made from all weather resistance rubber.

PARTNUMBERS

PART NUMBER	
ASH-BD1	Dock Bumper Left
ASH-BD2	Dock Bumper Right



AIRSTARTHOSES



PROPERTIES

8 kg.

175mm Base x 160mm High x 333mm Length.

Available in 175mm Base x 160mm High x 250mm Length, 6 kg aswell.
And 175mm Base x 160mm High x 500mm Length 12 kg.

Aircraft Wheel Chock is made from solid yellow rubber.
SBR/NAT rubber compound.
Optional with cord.
Optional with airline, company logo.

PARTNUMBERS

PART NUMBER	
ASH-BD10	175mm Base x 160mm High x 333mm
ASH-BD11	175mm Base x 160mm High x 500mm



AIRSTARTHOSSES



PROPERTIES


Maintenance free heat durable hose clamps. To stop the leak without re-tightening.
Tight fit in extreme operating temperatures.
Different sizes in stock.

PARTNUMBERS

PART NUMBER	
ASH-BD3	¼ inch
ASH-BD4	3/8 inch
ASH-BD5	1/2 inch
ASH-BD6	5/8 inch
ASH-BD7	3/4 inch
ASH-BD8	1 inch
ASH-BD9	2 inch
ASH-BD...	Other sizes check with sales



AIRSTARTHOSSES

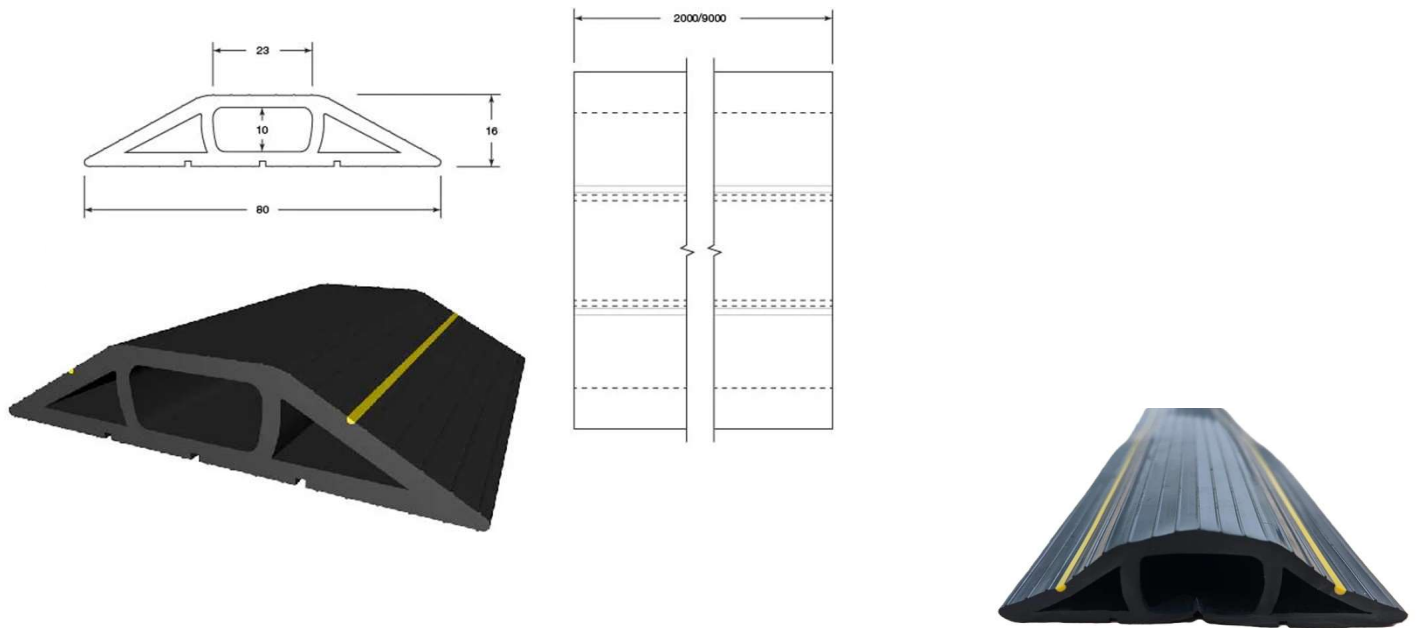

PROPERTIES

Approx Dims: 850 x 300 x 84 mm

Weight: 14 kg

Max axle weight: 12 Tonnes

Duarable rubber.


Industrial strength.

PARTNUMBERS

PART NUMBER	
ASH-BD19	Cable / hose protector



AIRSTARTHOSSES

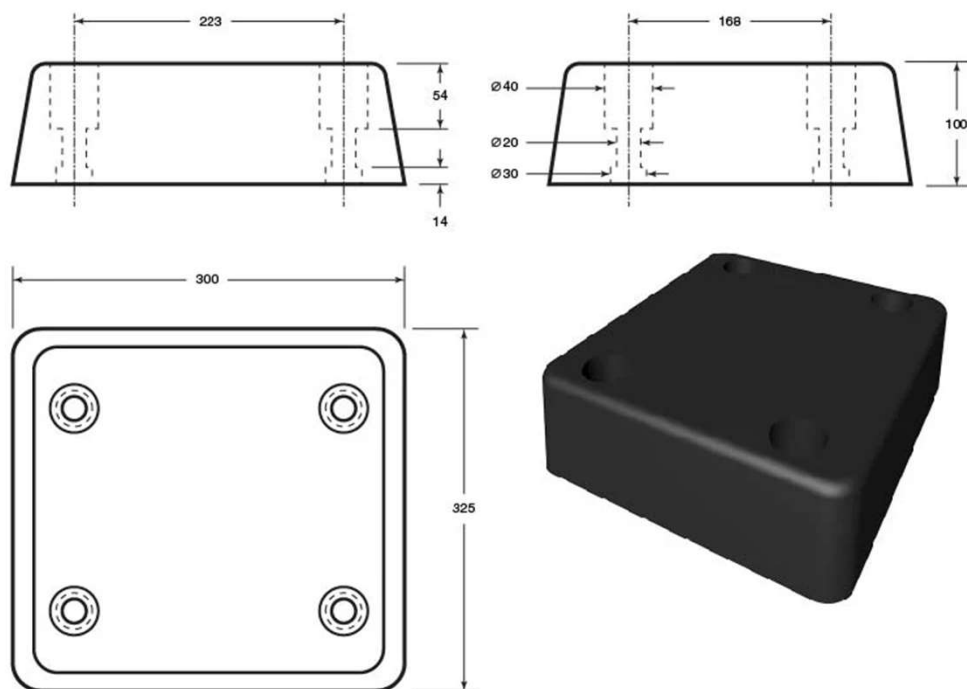

PROPERTIES

Approx Dims: 330 x 305 x 100 mm
Weight: 8.5 kg

This is a small rubber dock bumper. Unusually it has 4 fixing holes. It is ideal for protecting steelwork around a loading dock.
Duarable rubber.
Industrial strength.

PARTNUMBERS

PART NUMBER	
ASH-BD21	Dump protector



AIRSTARTHOSSES



PROPERTIES

Approx Dims: 1500 x 900 x 15mm thick

Weight: 10.5 kg

Durable rubber.


Industrial strength.

PARTNUMBERS

PART NUMBER	
ASH-BD22	1500 x 900 x 15 mm matt



AIRSTARTHOSSES

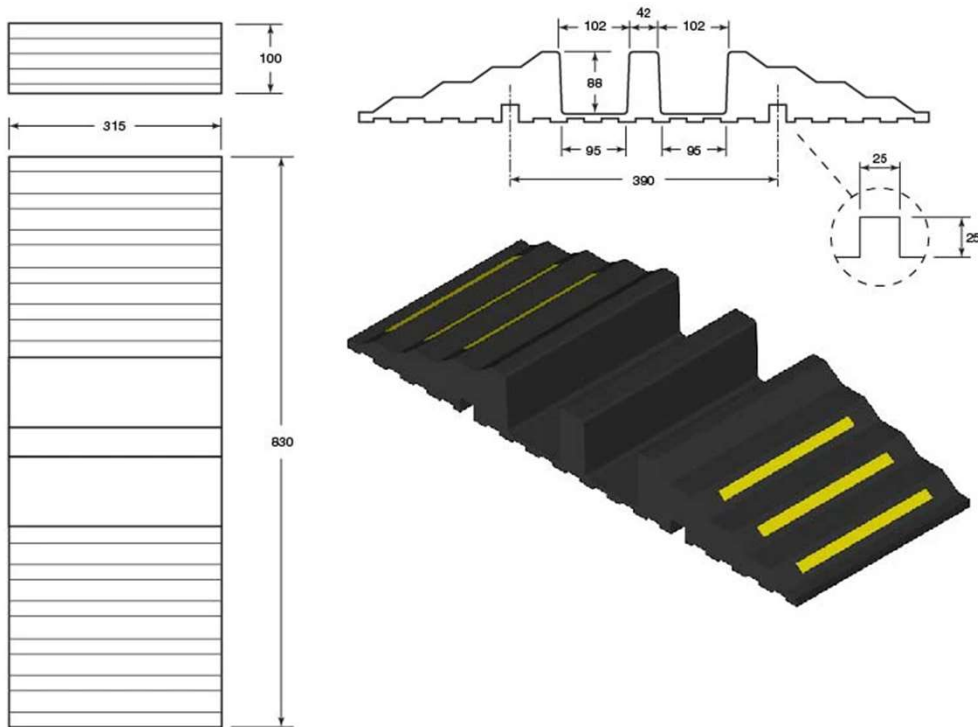

PROPERTIES


Approx Dims: 820 x 310 x 102 mm

Weight: 16 kg

Max axle weight: 12 Tonnes
Durable rubber.
Industrial strength.


PARTNUMBERS

PART NUMBER	
ASH-BD24	Cable / hose protector

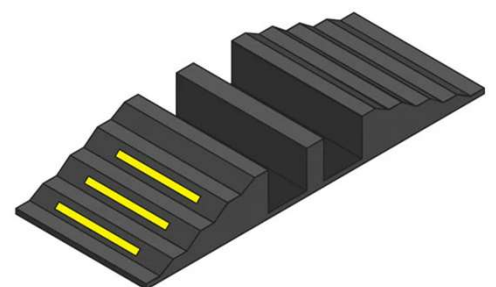



AIRSTARTHOSSES

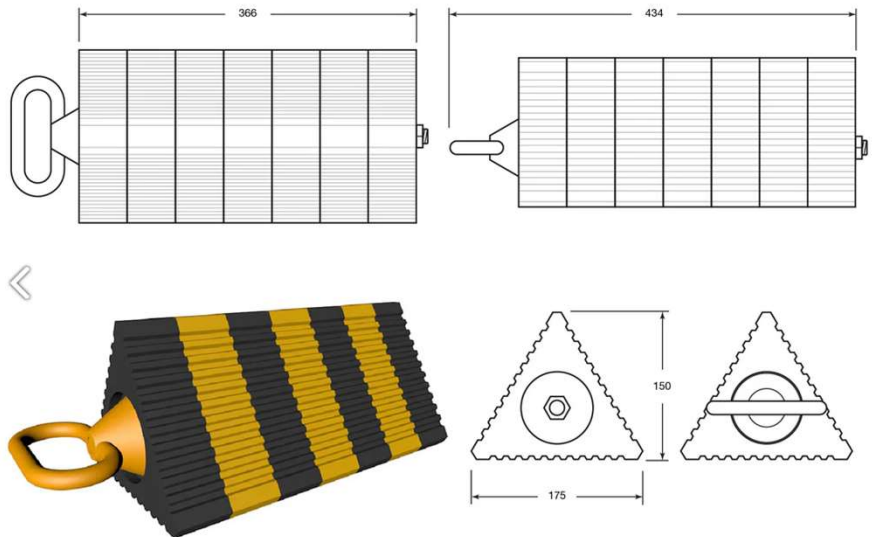

PROPERTIES


Approx Dims: 175mm base x 150mm high x 366mm long

Weight: 8 kg

Aircraft Chock with cast steel handle. Very solid construction. Durable rubber.
Industrial strength.


PARTNUMBERS

PART NUMBER	
ASH-BD25	Cable / hose protector

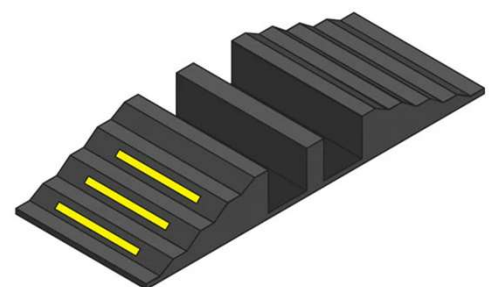




FRONT VIEW

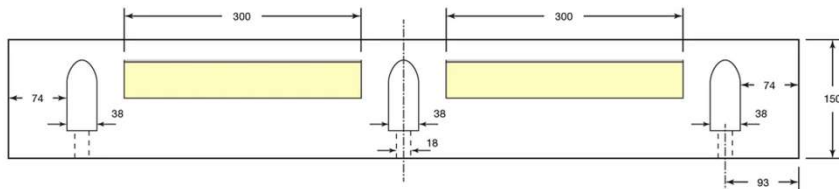

REAR VIEW

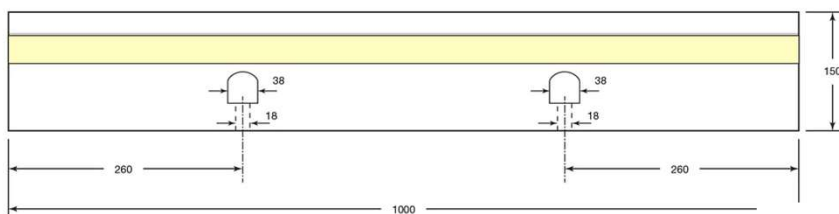

PROPERTIES

Approx Dims: 900 x 150 x 95 mm

Weight: 7.1 kg


The Kerb is a medium, high visibility, rubber kerb for car and light goods vehicle parks. They work especially well , one per parking bay, in front of buildings to avoid damage to either the vehicle or the building.Duarable rubber.
Industrial strength.

PARTNUMBERS

PART NUMBER	
ASH-BD28	Kerb



AIRSTARTHOSSES

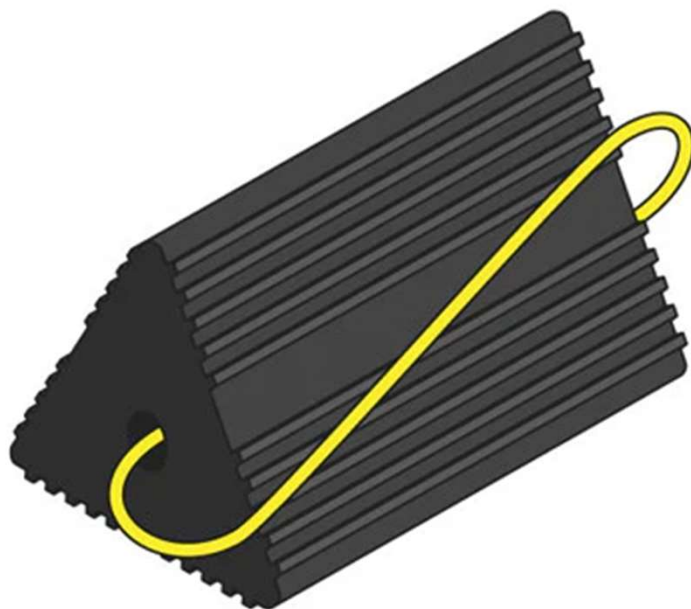

PROPERTIES

Approx Dims: 225 x 195 x 333 mm


Weight: 14 kg

PARTNUMBERS

PART NUMBER	
ASH-BD030	Wheel chock Approx Dims: 225 x 195 x 333 mm Weight: 14 kg



AIRSTARTHOSSES

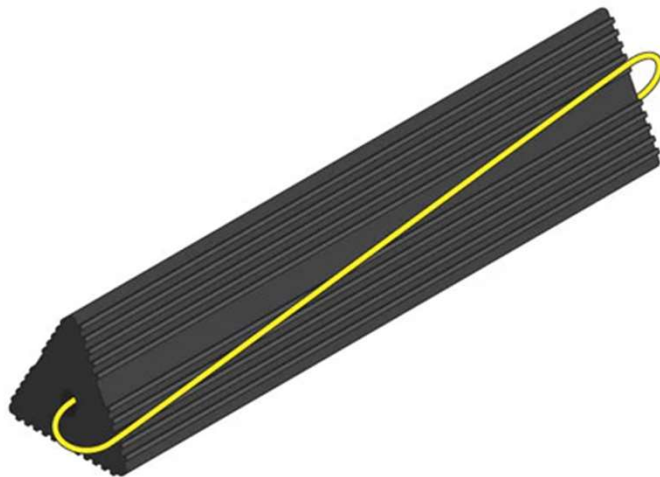

PROPERTIES

Approx Dims: 225 x 195 x 1000 mm

Weight: 42 kg

.Duarable rubber.


Industrial strength.

PARTNUMBERS

PART NUMBER	
ASH-BD031	Approx Dims: 225 x 195 x 1000 mm Weight: 42 kg



AIRSTARTHOSSES

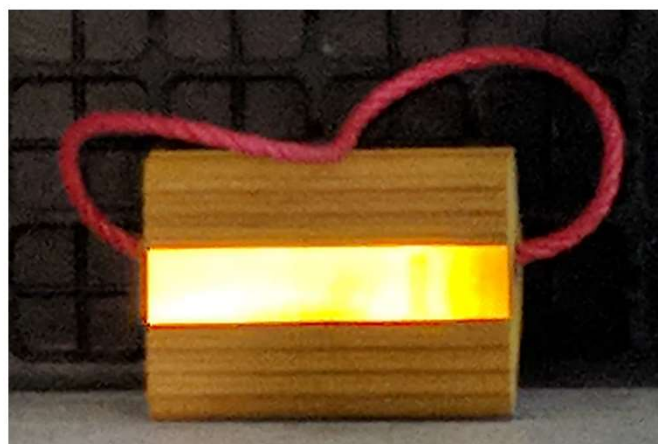

PROPERTIES

Approx Dims: 175mm Base x 160mm High x 250mm Length

Weight: 6kg

Aircraft Wheel Chock is made from solid yellow SBR/NAT rubber compound. .Duarable rubber.
Industrial strength.

PARTNUMBERS

PART NUMBER	
ASH-BD32	Approx Dims: 175mm Base x 160mm High x 250mm Length Weight: 6kg



AIRSTARTHOSSES



PROPERTIES

Approx Dims: 1000 x 590 x 3600mm (open)

Approx Dims: 1000 x 590 x 400mm (closed)

Weight: 18kg Expandable barrier.

Mobile barrier with wheels on one side so it can be moved easily.

PARTNUMBERS

PART NUMBER	
ASH-HG02	Barrier



PROPERTIES

Stainless Steel bollard ideal for controlling the movement and flow of pedestrians. A4 sign holder also available.

Approx Dims: 65 x 900mm
Weight: 12kg



Stainless Steel bollard ideal for controlling the movement and flow of pedestrians. A4 sign holder also available.

PARTNUMBERS

PART NUMBER	
ASH-HG04	Stainless Steel bollard



AIRSTARTHOSSES

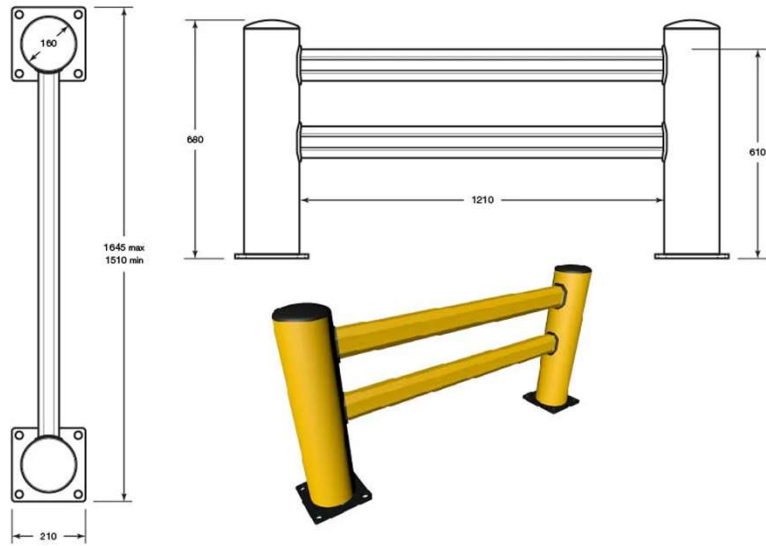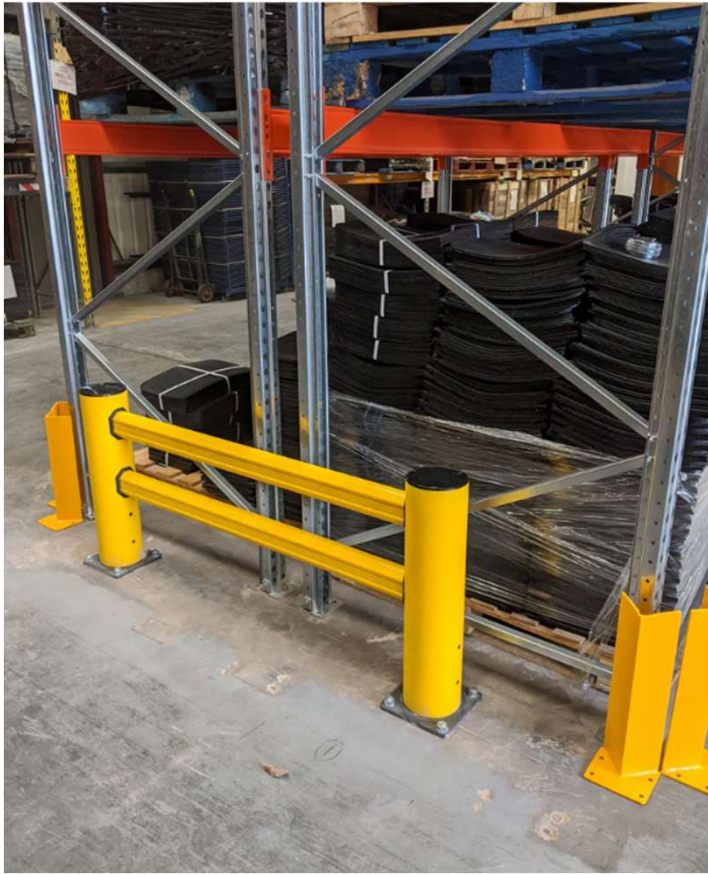

PROPERTIES

Approx Dims: 1645 x 210 x 680 mm Max length: 1645mm

Min length: 1505mm


Weight: 31 kg

Yellow, anti-corrosive and anti-scratch.

Can reduce damage caused by accidental collisions and direct impacts by forklifts and pallet trucks.

PARTNUMBERS

PART NUMBER	
ASH-HG011	Gard Rail

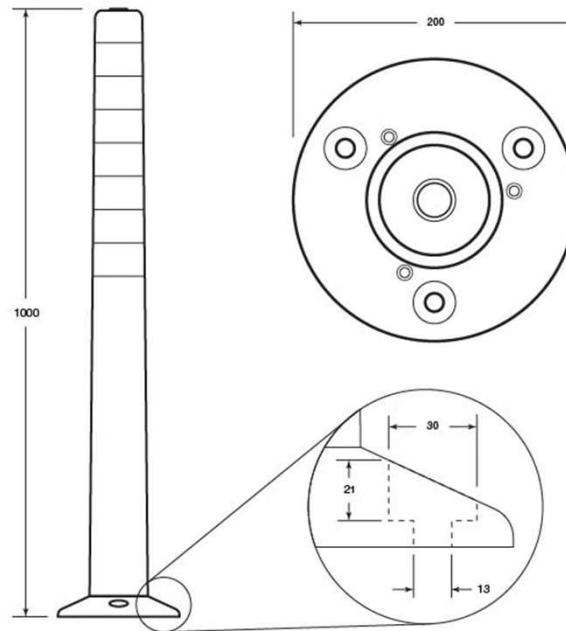

PROPERTIES

Approx Dims: 200mm base x 80mm diameter x 1000mm high

Weight: 1.7 kg

Made from Fluorescent Orange polyurethane with high-intensity embedded tape.


capacity: 20 kgs.

PARTNUMBERS

PART NUMBER	
ASH-HG012	Flexible bollard



AIRSTARTHOS

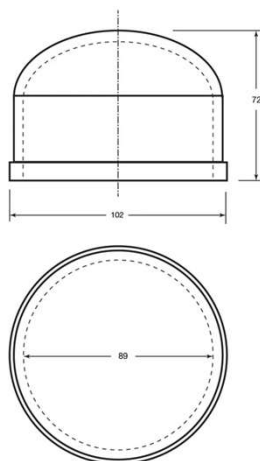

PROPERTIES

Approx Dims: ID 89mm : OD 102mm

Height: 72mm



Weight: 0.17 kg

PARTNUMBERS

PART NUMBER	
ASH-HG013	Caps



AIRSTARTHOSSES

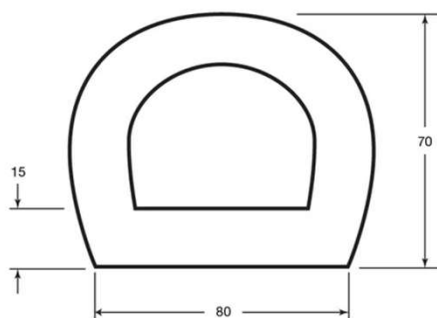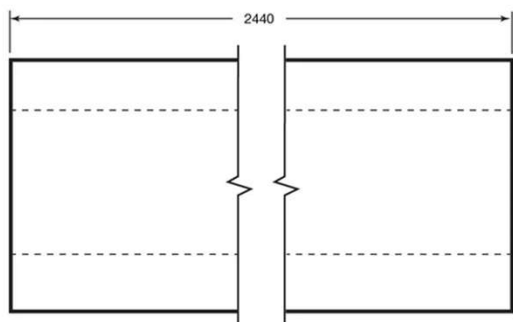

PROPERTIES

Approx Dims: 50 x 30 x 2500 mm

Weight: 5 kg






They are multi-purpose and are appropriate for a variety of industrial applications depending on their profiles, dimensions and material.

PARTNUMBERS

PART NUMBER	
ASH-HG014	Extrusion bumper



AIRSTARTHOSSES

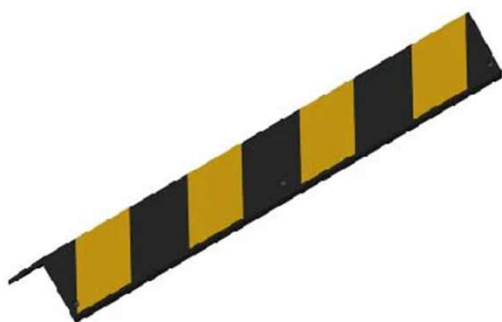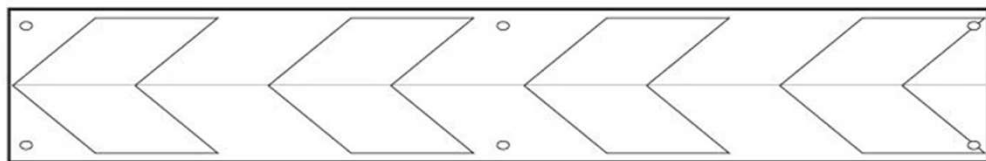

PROPERTIES

Approx Dims: 50 x 30 x 2500 mm

Weight: 5 kg


They are multi-purpose and are appropriate for a variety of industrial applications depending on their profiles, dimensions and material.

PARTNUMBERS

PART NUMBER	
ASH-HG014	Extrusion bumper



AIRSTARTHOSSES

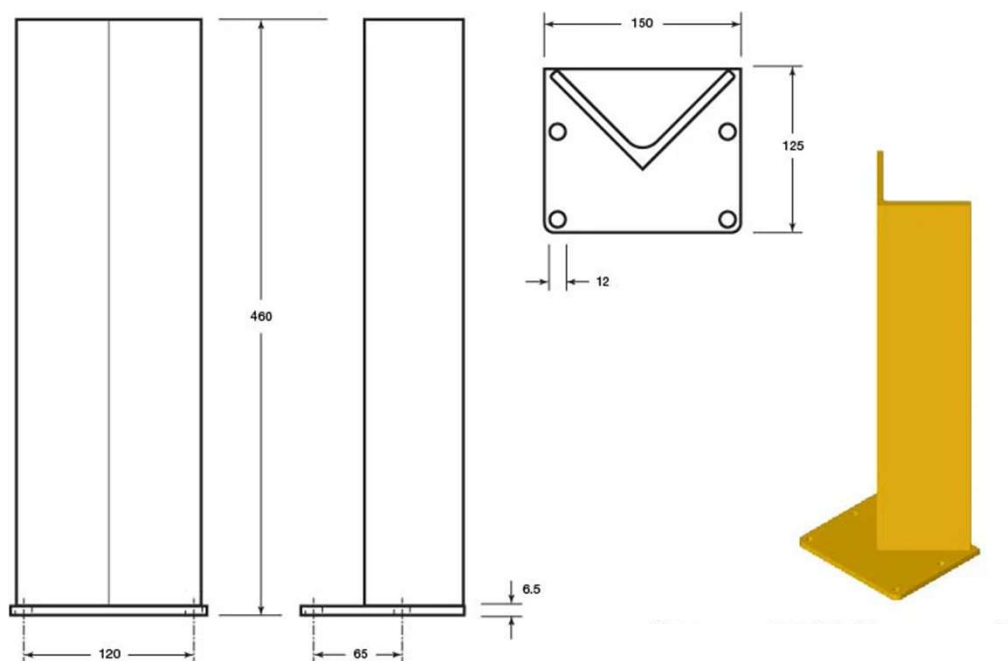

PROPERTIES



Approx Dims: 125 x 150 x 460 mm

Weight: 5.5 kg Colour: RAL1028 Yellow

This economical and solidly built simple design saves racking uprights from being damaged at the base by forklift trucks. It is always quicker and easier to replace racking base protectors than racking uprights.

PARTNUMBERS

PART NUMBER	
ASH-HG014	Rack protector

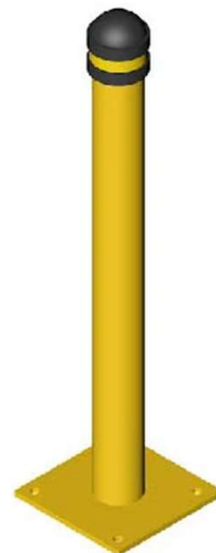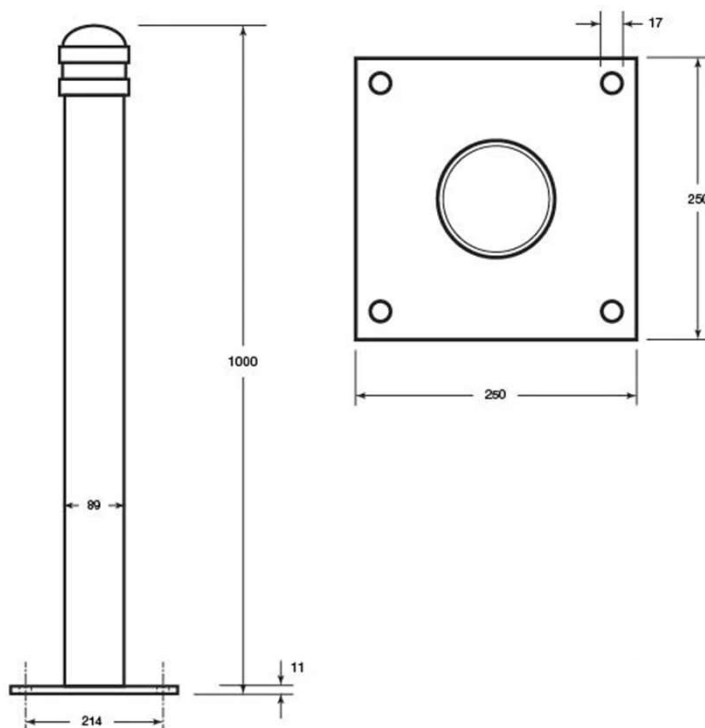

PROPERTIES

Approx Dims: 50 x 30 x 2500 mm

Weight: 5 kg



They are multi-purpose and are appropriate for a variety of industrial applications depending on their profiles, dimensions and material.

PARTNUMBERS

PART NUMBER	
ASH-HG014	Extrusion bumper



AIRSTARTHOSSES

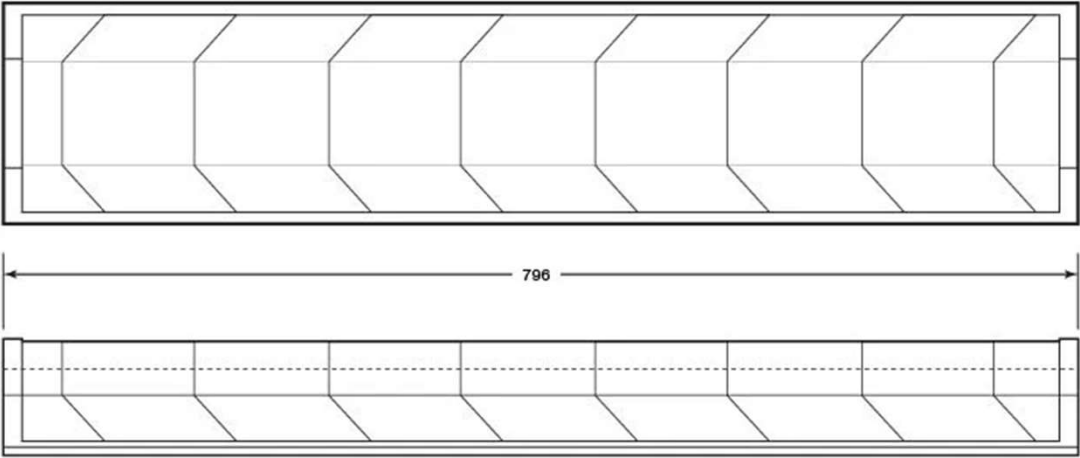

PROPERTIES

Approx Dims: 50 x 30 x 2500 mm

Weight: 5 kg



They are multi-purpose and are appropriate for a variety of industrial applications depending on their profiles, dimensions and material.

PARTNUMBERS

PART NUMBER	
ASH-HG014	Extrusion bumper



AIRSTARTHOSSES

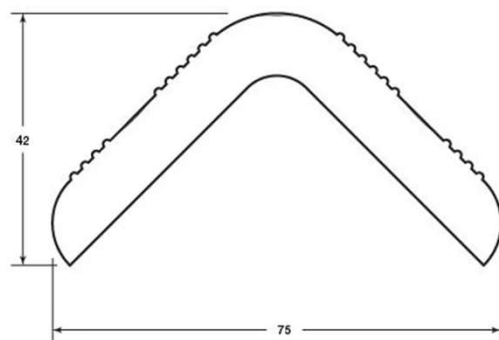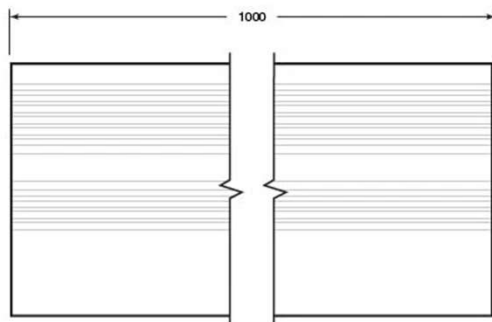

PROPERTIES



Approx Dims: 50 x 30 x 2500 mm

Weight: 5 kg

They are multi-purpose and are appropriate for a variety of industrial applications depending on their profiles, dimensions and material.

PARTNUMBERS

PART NUMBER	
ASH-HG014	Extrusion bumper



PROPERTIES

Approx Dims: 50 x 30 x 2500 mm

Weight: 5 kg

They are multi-purpose and are appropriate for a variety of industrial applications depending on their profiles, dimensions and material.



PARTNUMBERS

PART NUMBER	
ASH-HG014	Extrusion bumper



AIRSTARTHOSSES

Max Length: 32.3M

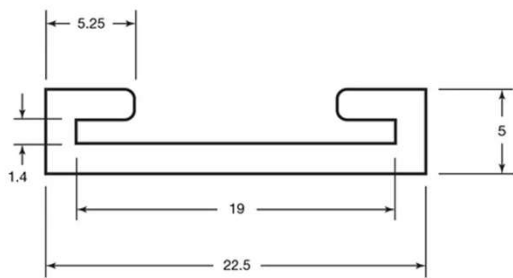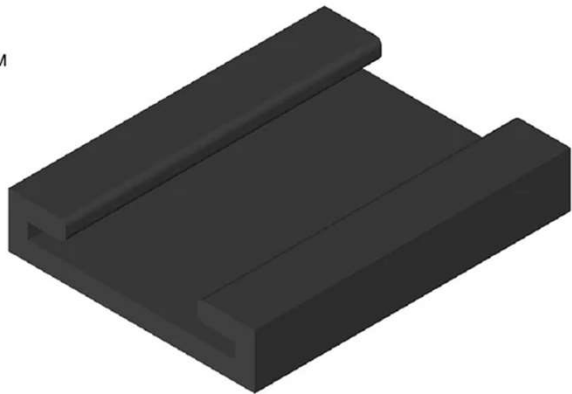

PROPERTIES




Available on length required.

PARTNUMBERS

PART NUMBER	
ASH-HG015	U Channel



AIRSTARTHOSSES

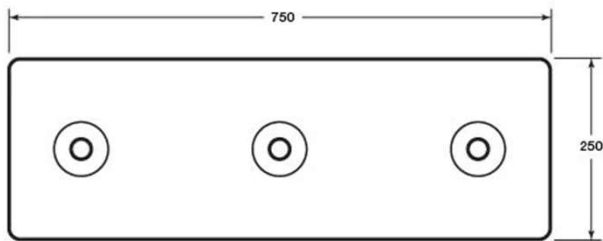

PROPERTIES


Approx Dims: 750 x 250 x 100 mm

Weight: 19.5 kg

750mm dock bumpers.

PARTNUMBERS

PART NUMBER	
ASH-HG016	Dock bumper

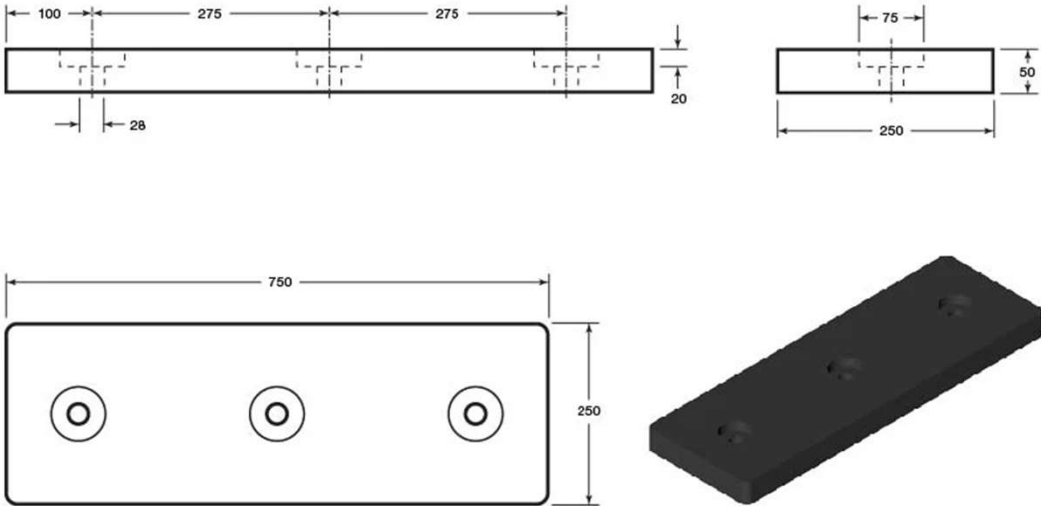

01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24


PROPERTIES

Weight: 15.5 kg

tall rubber dock bumper designed to protect a loading dock.

PARTNUMBERS

PART NUMBER	
ASH-HG017	Dock bumper

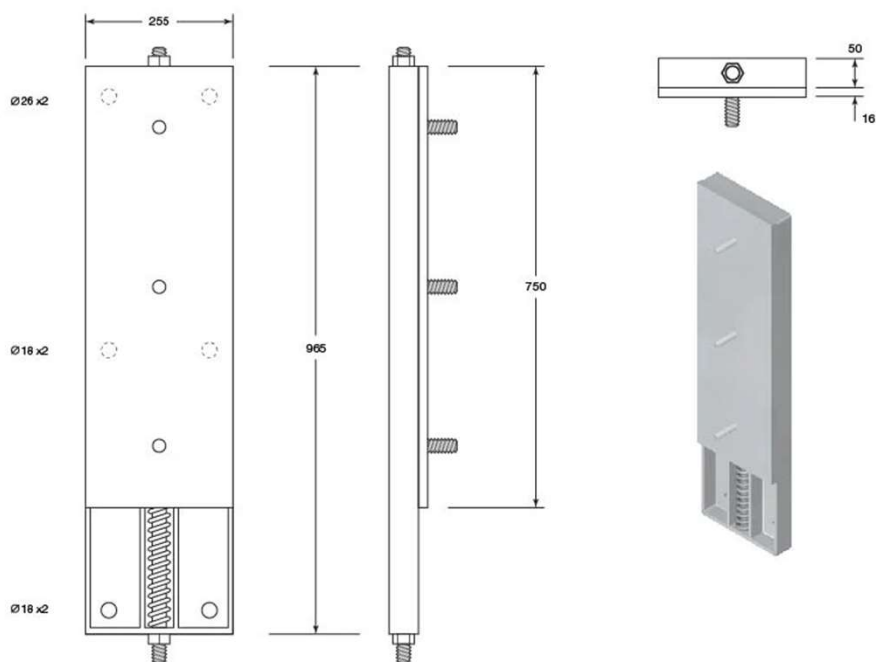


PROPERTIES

Approx Dims: 965 x 255 x 66 mm Weight: 50 kg

A spring loaded back plate

PARTNUMBERS

PART NUMBER	
ASH-HG019	Extrusion bumper

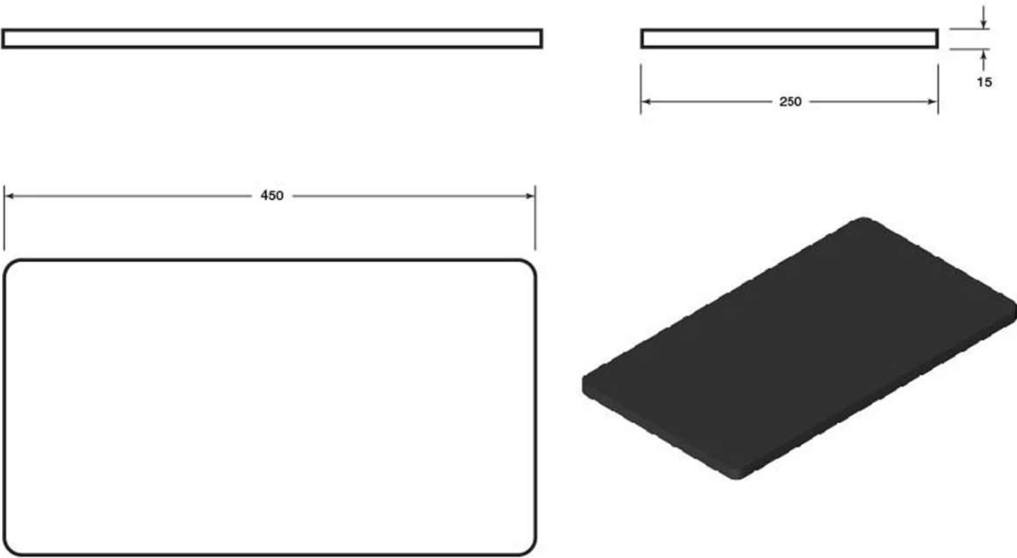

PROPERTIES

Approx Dims: 610 x 914 x 6mm

Weight: 6 kg


made from Commercial grade rubber.

PARTNUMBERS

PART NUMBER	
ASH-HG020	Matt



AIRSTARTHOSSES

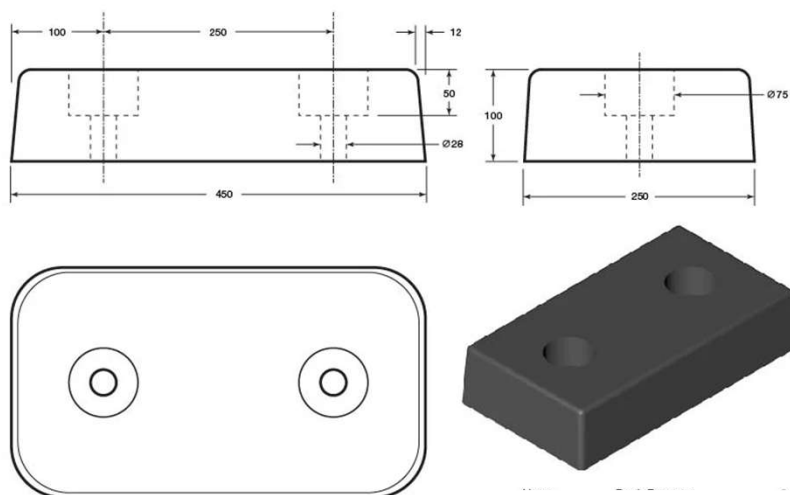

PROPERTIES


Approx Dims: 450 x 250 x 100 mm

Weight: 11kg

rubber dock bumper designed to protect a loading dock from reversing

PARTNUMBERS

PART NUMBER	
ASH-HG022	Docking bumper

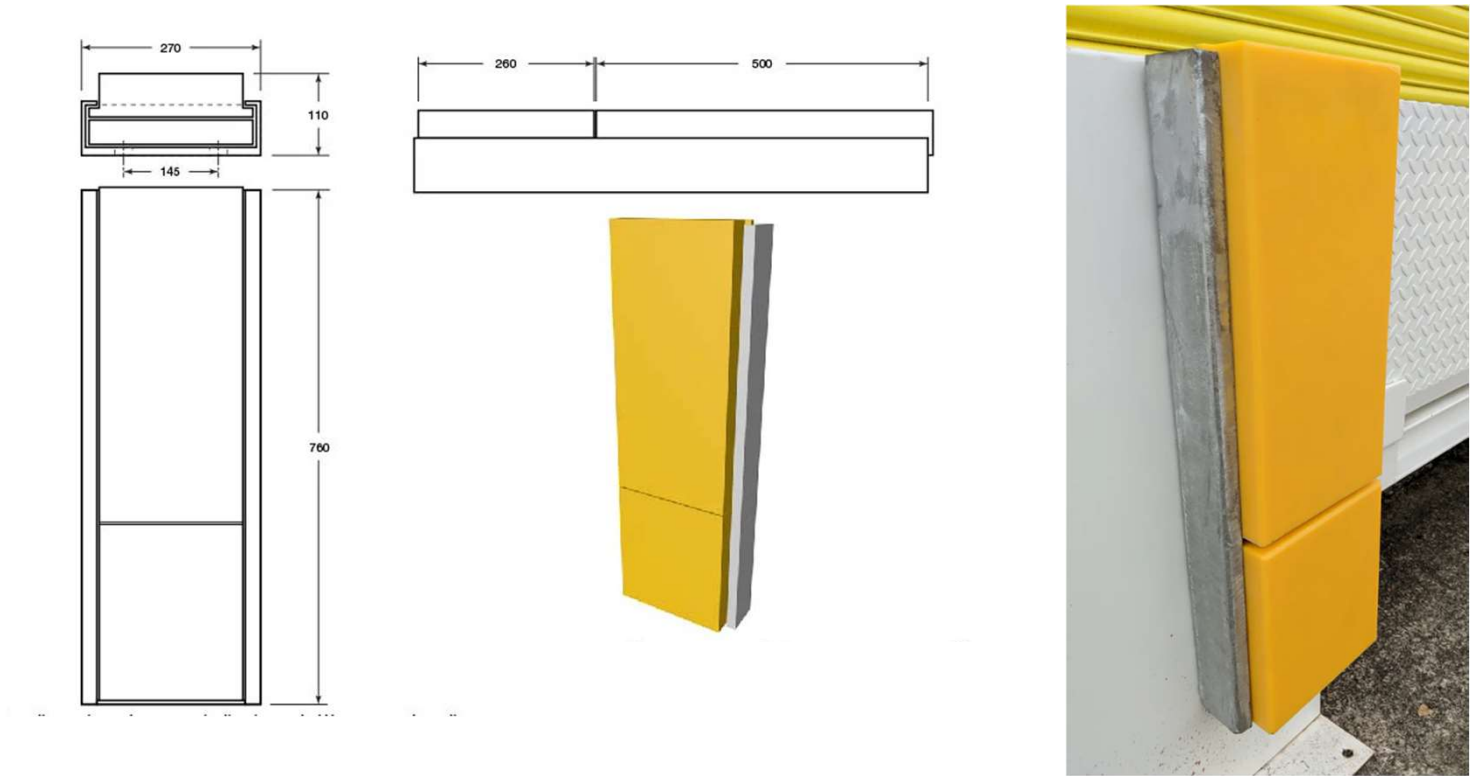

PROPERTIES

solid nylon bumper best used with one of our 15mm, 20mm or 50mm packers to give some compression.

PARTNUMBERS

PART NUMBER	
ASH-HG023	Nylon bumper



AIRSTARTHOSSES



PROPERTIES

Approx Dims: 490 x 80 x 80mm

Weight: 3.86kg

This Dock Bumper is a small bumper made from a highly resilient rubber compound. It is popular with European logistics companies on loading docks and HGV trailers.

PARTNUMBERS

PART NUMBER	
ASH-HG024	bumper



PROPERTIES

Approx. Dims: 450 x 450 x 100mm

Weight: 11.5 kg.

PARTNUMBERS

PART NUMBER	
ASH-HG025	Nylon Faced Dock Bumper L shape



AIRSTARTHOSSES



PROPERTIES

Nylon Faced Dock Bumper




They are multi-purpose and are appropriate for a variety of industrial applications

PARTNUMBERS

PART NUMBER	
ASH-HG026	Nylon Faced Dock Bumper



AIRSTARTHOS



PROPERTIES

Door Retainer Male Part

PARTNUMBERS

PART NUMBER	
ASH-HG027	Door Retainer Male Part



AIRSTARTHOSSES



PROPERTIES



Approx Dims: 50 x 30 x 2500 mm

Weight: 5 kg

They are multi-purpose and are appropriate for a variety of industrial applications depending on their profiles, dimensions and material.

PARTNUMBERS

PART NUMBER	
ASH-HG028	Extrusion bumper

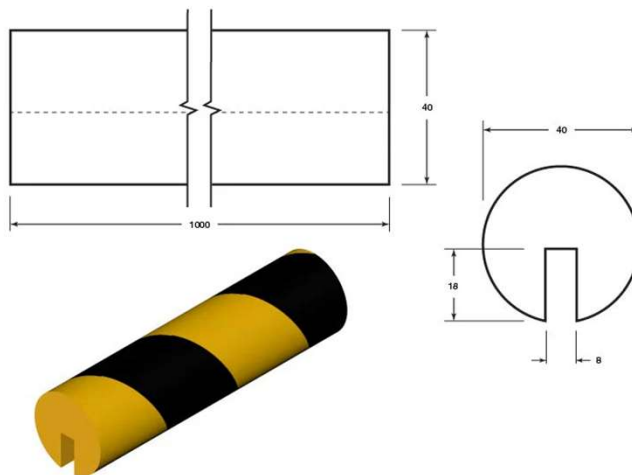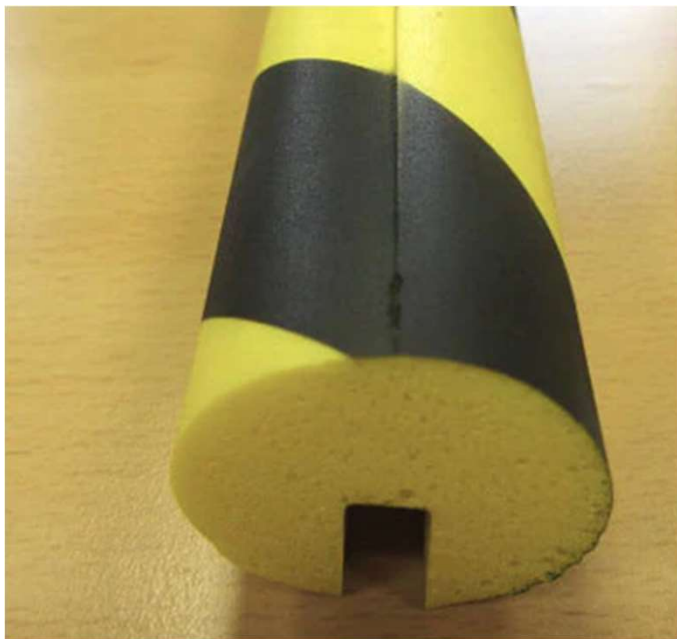

PROPERTIES


Approx Dims: 1000 x 40 mm Weight: 0.38 kg

Foam Edge has a 20 x 8mm slot.

The slot has a 3M self-adhesive strips attached for easy fixing.

PARTNUMBERS

PART NUMBER	
ASH-HG029	Foam edge

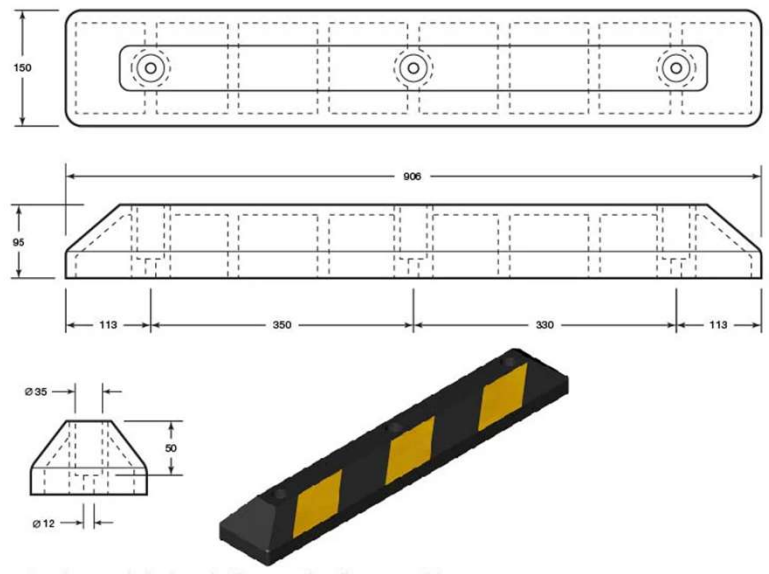

PROPERTIES

Approx Dims: 900 x 150 x 95 mm

Weight: 7.1 kg

is a medium, high visibility, rubber kerb for car and light goods vehicle parks. They work especially well , one per parking bay, in front of buildings to avoid damage to either the vehicle or the building.


Can be fixed into concrete

PARTNUMBERS

PART NUMBER	
ASH-HG030	Kerb



AIRSTARTHOSSES

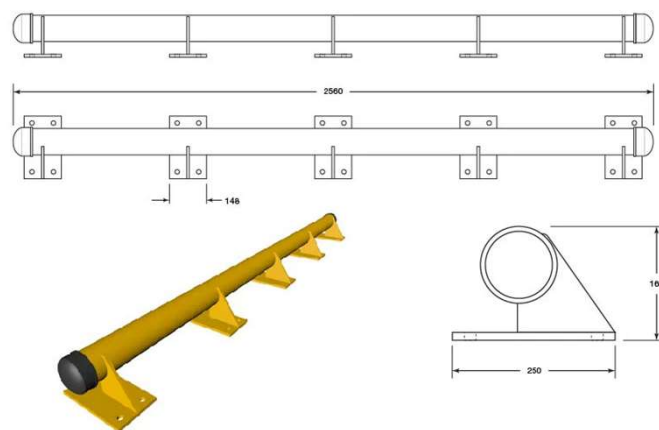

PROPERTIES

Approx Dims: 2500mm long x 170mm max height

Weight: 53 kg

Made from 100 dia steel tube welded to 5 substantial fixing plates. Each of the 5 plates has 4 x 16mm dia holes.


Suitable for HGVs.

PARTNUMBERS

PART NUMBER	
ASH-HG031	Kerb



AIRSTARTHOSSES

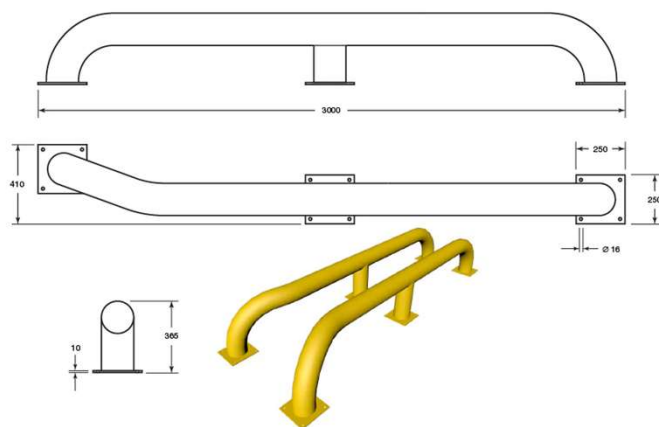

PROPERTIES

Approx Dims: 3000 x 600 x 365 mm

Weight: 150 kg per pair




This pair of 3 metre bolt down wheel guides are made from galvanized steel with yellow (RAL 1028) powder coat over. Their splayed ends increase the effectiveness of this durable driver aid ensuring that trailers contact the loading dock squarely. Tube wall thickness is 5mm. Tube diameter is 165mm.

PARTNUMBERS

PART NUMBER	
ASH-HG032	Wheel guide



AIRSTARTHOSSES

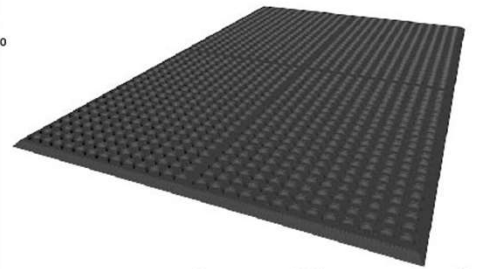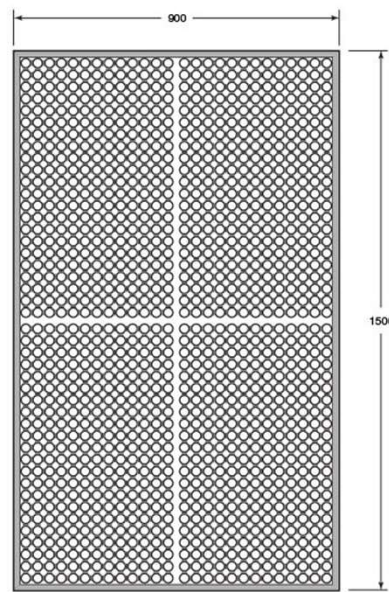

PROPERTIES

Approx Dims: 1500 x 900 x 15mm thick

Weight: 10.5 kg

cheap option to keep your feet off cold concrete, ideal in front of work benches.

PARTNUMBERS

PART NUMBER	
ASH-HG033	



AIRSTARTHOSSES



PROPERTIES

They are multi-purpose and are appropriate for a variety of industrial applications


Approx Dims: 1200 wide x 10000mm long x 3mm thick

Weight: 65 kg

Please call for up to date prices

PARTNUMBERS

PART NUMBER	
ASH-HG034	By roll

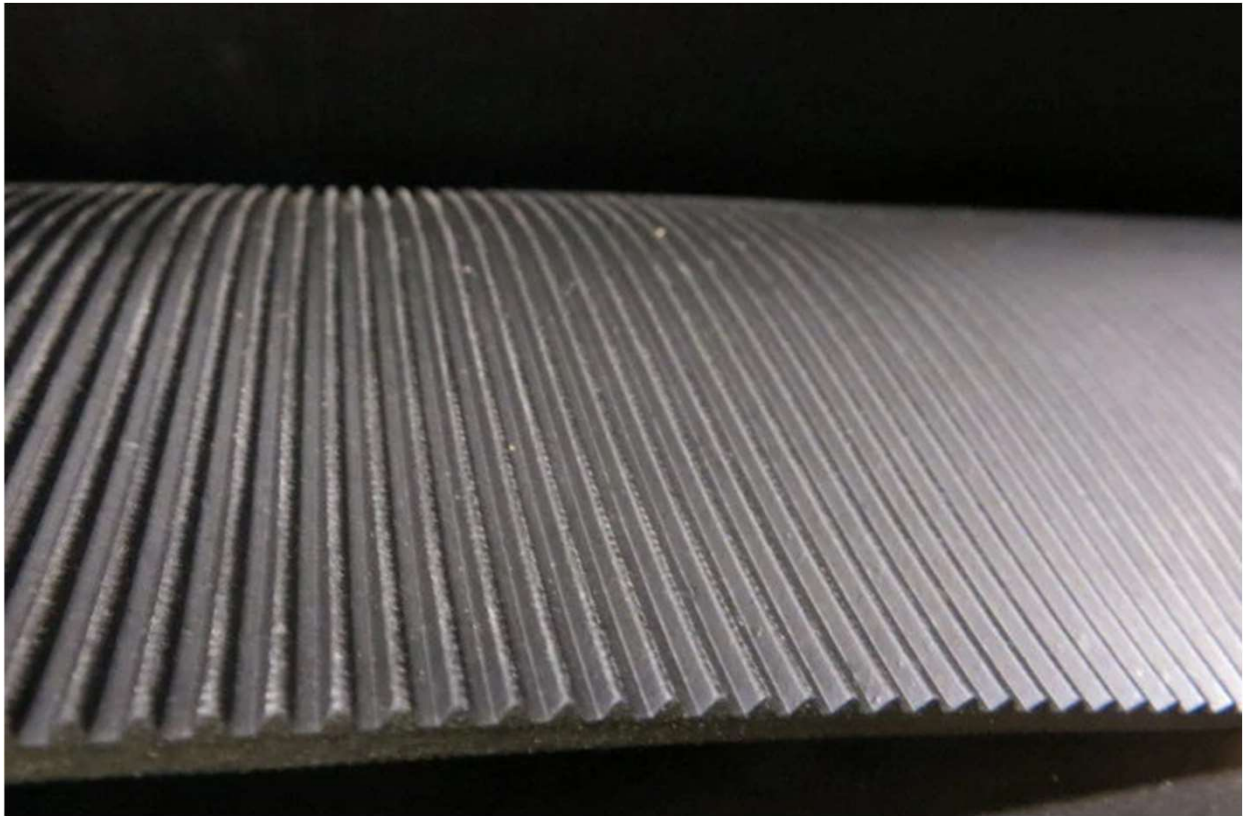

PROPERTIES

Plates

PARTNUMBERS

PART NUMBER	
ASH-HG035	Cut to size



AIRSTARTHOSSES



PROPERTIES


Large stock of rubber plates

PARTNUMBERS

PART NUMBER	
ASH-HG036	Cut to size



AIRSTARTHOS

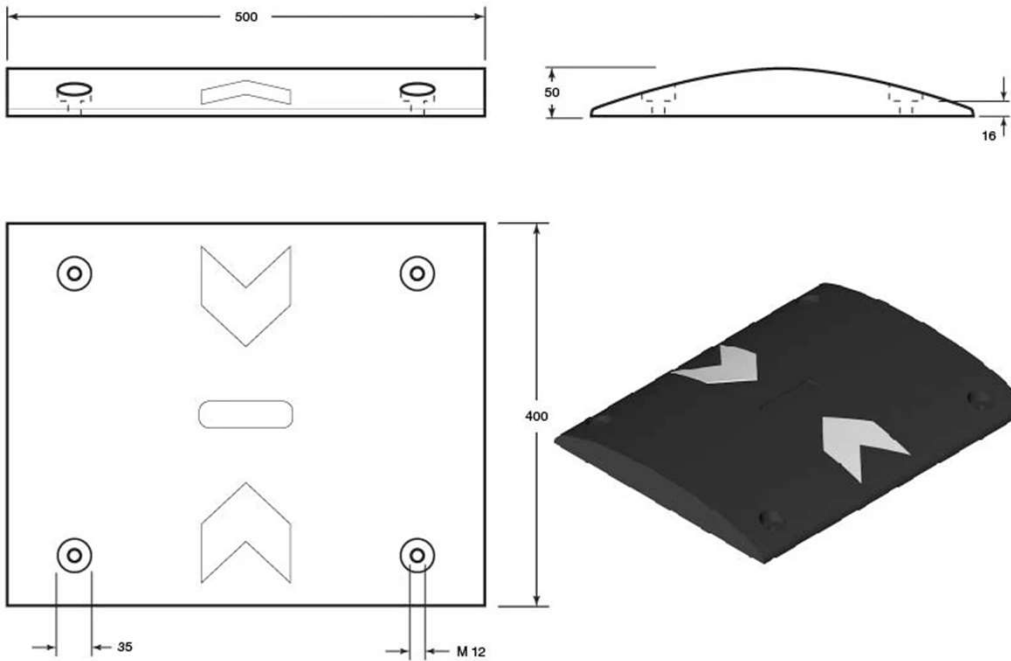

PROPERTIES

Approx Dims: 500 x 400 x 50mm

Weight: 8.5kg Black Speed Bump - Middle section.

Material: Commercial grade rubber capped with solid black rubber.

Ideal for car parks and supermarkets.

PARTNUMBERS

PART NUMBER	
ASH-HG037	speed bump



SCAT HOSES - ADVANTAGES

"SCAT" type ducting has the same type construction as "CAT" except with red silicone rubber impregnation. Out advantages : for use in conducting extremely cold or hot air with temperatures from -80° to over 550°F.

PROPERTIES

Flexible hoses specially recommended in gas conductions at high temperatures, engine exhaust fume extraction from a point immediately close to the ejection area, electronic units cooling and welding gas aspiration.

Hot air extraction in ceramic kilns.

Airplane or helicopter cockpit heating.

Ventilation and air-conditioning in boats.

Protection of electric cables passing through extremely hot areas.

Sheathing of pipework transporting hot air..

This product is manufactured with one fiber glass reinforcement with high temperature resistance silicone rubber. The inner part is coated with visible steel wire.

PARTNUMBER

PART NUMBER	
ASH-SC D10	Internal diameter 10 mm
ASH-SC D13	Internal diameter 13 mm
ASH-SC D14	Internal diameter 14 mm
ASH-SC D16	Internal diameter 16 mm
ASH-SC D17	Internal diameter 17 mm
ASH-SC D18	Internal diameter 18 mm
ASH-SC D19	Internal diameter 19 mm
ASH-SC D20	Internal diameter 20 mm
ASH-SC D22	Internal diameter 22 mm
ASH-SC D25	Internal diameter 25 mm
ASH-SC D28	Internal diameter 28 mm
ASH-SC D32	Internal diameter 32 mm
ASH-SC D34	Internal diameter 34 mm



AIRSTARHOSES



SCAT HOSES - ADVANTAGES

"SCAT" type ducting has the same type construction as "CAT" except with red silicone rubber impregnation. Our advantage : For use in conducting extremely cold or hot air with temperatures from -80° to over 550°F.

PROPERTIES

These kind of flexible hoses are specially recommended in gas conductions at high temperatures, engine exhaust fume extraction from a point immediately close to the ejection area, electronic units cooling and welding gas aspiration.

Hot air extraction in ceramic kilns.

Airplane or helicopter cockpit heating.

Ventilation and air-conditioning in boats.

Protection of electric cables passing through extremely hot areas.

Sheathing of pipework transporting hot air..

This product is manufactured with one fiber glass reinforcement with high temperature resistance silicone rubber. The inner part is coated with visible steel wire.

Optional : anti abrasion cover.

Temperature – 80 to +310€

Straight cut

For non corrosion medium to high temperature gasses.

-0.580 bar to +1.800 bar

Flame retardant

Antistatic, if spiral earthed. 10n6



AIRSTARTHOSSES



PARTNUMBERS

PART NUMBER	
ASH-SC D38	Internal diameter 38 mm
ASH-SC D39	Internal diameter 39 mm
ASH-SC D40	Internal diameter 40 mm
ASH-SC D41	Internal diameter 41 mm
ASH-SC D42	Internal diameter 42 mm
ASH-SC D44	Internal diameter 44 mm
ASH-SC D45	Internal diameter 45 mm
ASH-SC D46	Internal diameter 46 mm
ASH-SC D47	Internal diameter 47 mm
ASH-SC D48	Internal diameter 48 mm
ASH-SC D50	Internal diameter 50 mm
ASH-SC D51	Internal diameter 51 mm
ASH-SC D52	Internal diameter 52 mm
ASH-SC D55	Internal diameter 55 mm
ASH-SC D57	Internal diameter 57 mm
ASH-SC D60	Internal diameter 60 mm
ASH-SC D61	Internal diameter 61 mm
ASH-SC D63	Internal diameter 63 mm
ASH-SC D64	Internal diameter 64 mm
ASH-SC D65	Internal diameter 65 mm
ASH-SC D67	Internal diameter 67 mm
ASH-SC D70	Internal diameter 70 mm
ASH-SC D72	Internal diameter 72 mm
ASH-SC D74	Internal diameter 74 mm
ASH-SC D76	Internal diameter 76 mm
ASH-SC D80	Internal diameter 80 mm
ASH-SC D82	Internal diameter 82 mm
ASH-SC D83	Internal diameter 83 mm
ASH-SC D85	Internal diameter 85 mm



PARTNUMBERS

PART NUMBER	
ASH-SC D88	Internal diameter 88 mm
ASH-SC D90	Internal diameter 90 mm
ASH-SC D92	Internal diameter 92 mm
ASH-SC D95	Internal diameter 95 mm
ASH-SC D100	Internal diameter 100 mm
ASH-SC D102	Internal diameter 102 mm
ASH-SC D106	Internal diameter 106 mm
ASH-SC D108	Internal diameter 108 mm
ASH-SC D110	Internal diameter 110 mm
ASH-SC D114	Internal diameter 114 mm
ASH-SC D115	Internal diameter 115 mm
ASH-SC D120	Internal diameter 95 mm
ASH-SC D125	Internal diameter 100 mm
ASH-SC D127	Internal diameter 102 mm
ASH-SC D130	Internal diameter 106 mm
ASH-SC D140	Internal diameter 108 mm
ASH-SC D150	Internal diameter 110 mm
ASH-SC D152	Internal diameter 114 mm
ASH-SC D155	Internal diameter 115 mm
ASH-SC D160	Internal diameter 95 mm
ASH-SC D165	Internal diameter 106 mm
ASH-SC D170	Internal diameter 108 mm
ASH-SC D178	Internal diameter 110 mm
ASH-SC D180	Internal diameter 114 mm
ASH-SC D203	Internal diameter 115 mm
ASH-SC D210	Internal diameter 95 mm
ASH-SC D220	Internal diameter 106 mm
ASH-SC D254	Internal diameter 254 mm
ASH-SC D305	Internal diameter 305mm



SCEET HOSES - ADVANTAGES

Flexible hose made of two layers of fiber glass and silicone coated with a non-visible steel wire inside the hose wall. Applications. Double Ply Silicone Coated Ducting.

PROPERTIES

"SCEET" type ducting has the same type construction as "CEET" except with red silicone rubber impregnation. For use in conducting extremely cold or hot air with temperatures from -80° to over 550°F.

- Highly flexible
- Easily installed around obstructions and sharp bends
- Less air friction loss than similar non-lined ducting
- Ideal for use in extremely cold or hot air, ranging from -80°F to +550°F
- Good for conveying fumes

PARTNUMBER

PART NUMBER	
ASH-SCT D10	Internal diameter 10 mm
ASH-SCT D13	Internal diameter 13 mm
ASH-SCT D14	Internal diameter 14 mm
ASH-SCT D16	Internal diameter 16 mm
ASH-SCT D17	Internal diameter 17 mm
ASH-STC D18	Internal diameter 18 mm
ASH-SCT D19	Internal diameter 19 mm
ASH-SCT D20	Internal diameter 20 mm
ASH-SCT D22	Internal diameter 22 mm
ASH-SCT D25	Internal diameter 25 mm
ASH-SCT D28	Internal diameter 28 mm
ASH-SCT D32	Internal diameter 32 mm
ASH-SCT D34	Internal diameter 34 mm



PARTNUMBERS

PART NUMBER	
ASH-SCT D38	Internal diameter 38 mm
ASH-SCT D39	Internal diameter 39 mm
ASH-SCT D40	Internal diameter 40 mm
ASH-SCT D41	Internal diameter 41 mm
ASH-SCT D42	Internal diameter 42 mm
ASH-SCT D44	Internal diameter 44 mm
ASH-SCT D45	Internal diameter 45 mm
ASH-SCT D46	Internal diameter 46 mm
ASH-SCT D47	Internal diameter 47 mm
ASH-SCT D48	Internal diameter 48 mm
ASH-SCT D50	Internal diameter 50 mm
ASH-SCT D51	Internal diameter 51 mm
ASH-SCT D52	Internal diameter 52 mm
ASH-SCT D55	Internal diameter 55 mm
ASH-SCT D57	Internal diameter 57 mm
ASH-SCT D60	Internal diameter 60 mm
ASH-SCT D61	Internal diameter 61 mm
ASH-SCT D63	Internal diameter 63 mm
ASH-SCT D64	Internal diameter 64 mm
ASH-SCT D65	Internal diameter 65 mm
ASH-SCT D67	Internal diameter 67 mm
ASH-SCT D70	Internal diameter 70 mm
ASH-SCT D72	Internal diameter 72 mm
ASH-SCT D74	Internal diameter 74 mm
ASH-SCT D76	Internal diameter 76 mm
ASH-SCT D80	Internal diameter 80 mm
ASH-SCT D82	Internal diameter 82 mm
ASH-SCT D83	Internal diameter 83 mm
ASH-SCT D85	Internal diameter 85 mm



AIRSTARTHOSSES



PARTNUMBERS

PART NUMBER	
ASH-SCT D88	Internal diameter 88 mm
ASH-SCT D90	Internal diameter 90 mm
ASH-SCT D92	Internal diameter 92 mm
ASH-SCT D95	Internal diameter 95 mm
ASH-SCT D100	Internal diameter 100 mm
ASH-SCT D102	Internal diameter 102 mm
ASH-SCT D106	Internal diameter 106 mm
ASH-SCT D108	Internal diameter 108 mm
ASH-SCT D110	Internal diameter 110 mm
ASH-SCT D114	Internal diameter 114 mm
ASH-SCT D115	Internal diameter 115 mm
ASH-SCT D120	Internal diameter 95 mm
ASH-SCT D125	Internal diameter 100 mm
ASH-SCT D127	Internal diameter 102 mm
ASH-SCT D130	Internal diameter 106 mm
ASH-SCT D140	Internal diameter 108 mm
ASH-SCT D150	Internal diameter 110 mm
ASH-SCT D152	Internal diameter 114 mm
ASH-SCT D155	Internal diameter 115 mm
ASH-SCT D160	Internal diameter 95 mm
ASH-SCT D165	Internal diameter 106 mm
ASH-SCT D170	Internal diameter 108 mm
ASH-SCT D178	Internal diameter 110 mm
ASH-SCT D180	Internal diameter 114 mm
ASH-SCT D203	Internal diameter 115 mm
ASH-SCT D210	Internal diameter 95 mm
ASH-SCT D220	Internal diameter 106 mm
ASH-SCT D254	Internal diameter 254 mm
ASH-SCT D305	Internal diameter 305mm



