



---

**CERTIFICATION :** Meets UL94VTM-O standards

We offer the finest LAVATORY HOSE to meet our customers' needs.

Hoses come standard in 4" diameter and in lengths of 8', 10' and 15' and 20 feet and is made of durable, premium lavatory hose with outstanding features : - Temperature – 40°C to +90°C ( -40°F to 194°F ) - 30% more abrasion resistant than most of the hoses.

A unique spiral construction that welds a protective polyurethane-coated wire to the hose wall - Lasting 4 times longer than any other hoses used in the same application.

The ultimate hose provides a long and un-interrupted service.

Molecularly bonded and heat-sealed, Nylon rod reinforced

Used in both positive and negative pressure applications.


The original Crush-Proof Lavatory Hose.

Excellent UV stabilization for outdoor use

Mold and mildew inhibitors (Pictures and data are non binding and can be changed by the manufacturer without notice)

**BUILT TO EXCEED THE DEMANDING NEEDS OF THE GLOBAL AVIATION INDUSTRY**

**AVAILABLE LENGHTS :** 8, 10, 12, 15 or 20 FEET or on request.

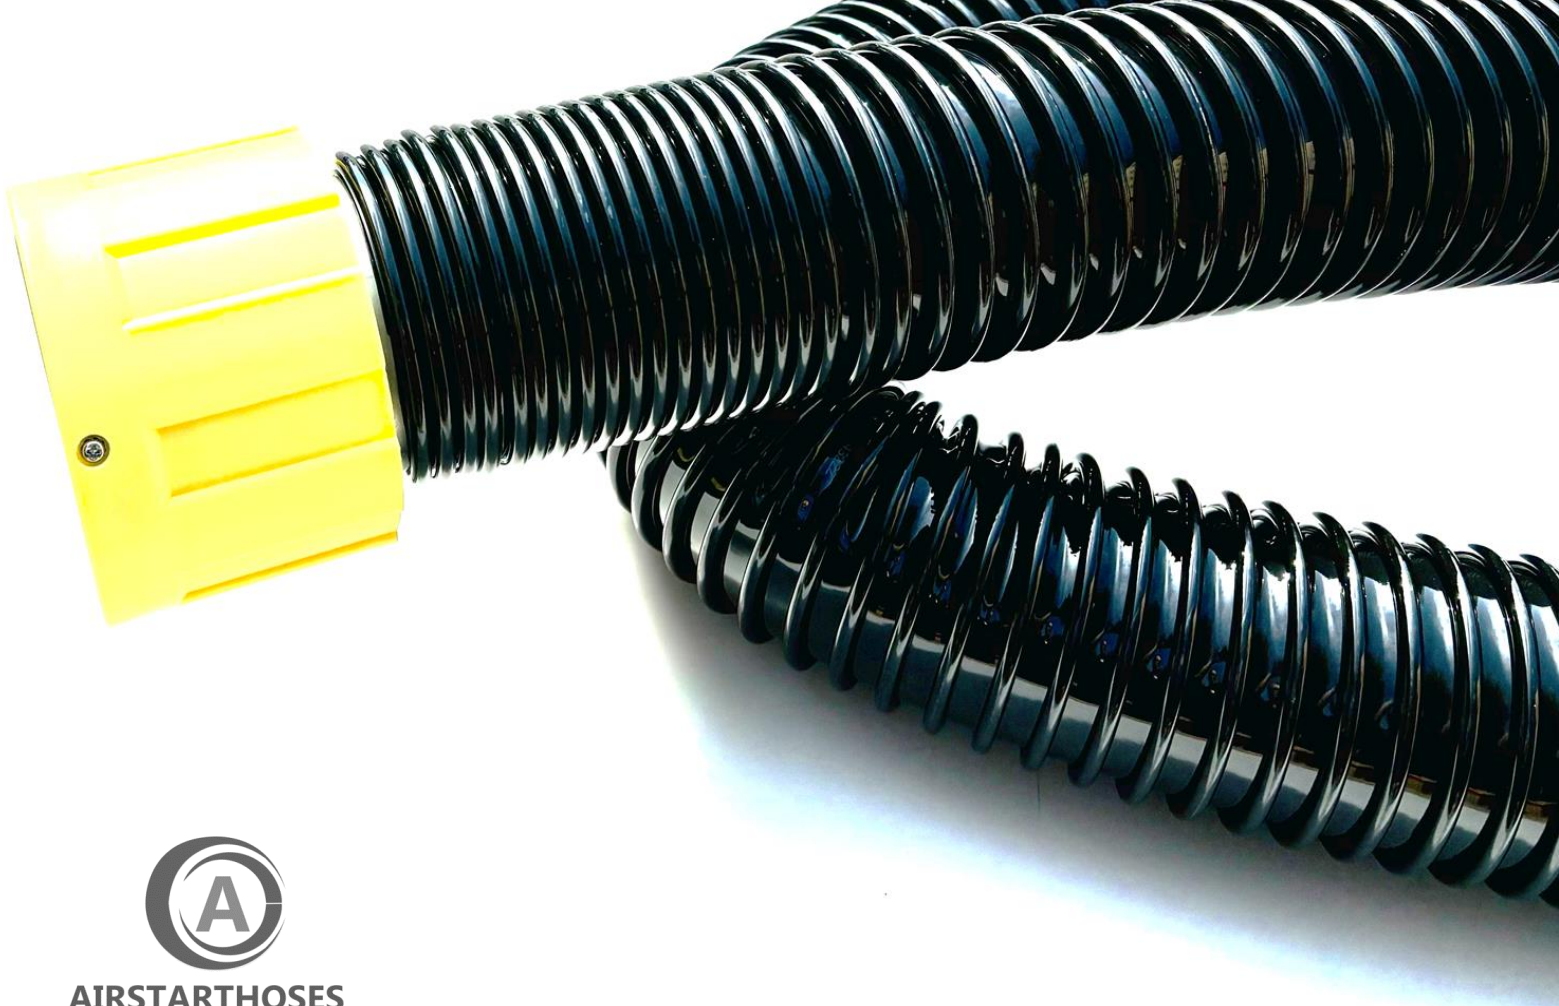

**AIRSTARTHOSSES**

**Air Start Hose Black Rubber Lavatory Service Dump Hose, 4-Inch** is built to provide reliability on the tarmac. Our black rubber version provides resistant to UV and extreme condition. Translucent lavatory dump hoses can be convenient, but even UV-protected translucent hoses can degrade more quickly. For hot, sunny, or otherwise extreme environments, our heavy-duty 4-inch diameter black rubber lavatory dump hose is recommended. Anti crush. A/C to Lav cart hose Lightweight (1.5 lbs/feet).

**BUILT TO EXCEED THE DEMANDING NEEDS OF THE GLOBAL AVIATION INDUSTRY**

**PROPERTIES :** Tailor made solutions available.

Tailor made solutions available.

Temperature – 40°C to 90°C (-40°F to 194°F)

30% more resistance to abrasion than any other hose

A unique spiral protection protecting the polyurethane

Unrivalled lifespan. 4 times longer than any other hose used for the same application

Your reliable specialist for airstarthoses and coupling.

Printed copies are uncontrolled, and properties might change without any notification.

**AVAILABLE LENGHTS :** 8, 10, 12, 15 or 20 FEET or on request.

P/N ACP-BLACK LAV-8 Feet

P/N ACP-BLACK LAV-10 Feet

P/N ACP-BLACK LAV-12 Feet

P/N ACP-BLACK LAV-15 Feet


P/N ACP-BLACK LAV-20 Feet



**BUILT TO EXCEED THE DEMANDING NEEDS OF THE  
GLOBAL AVIATION INDUSTRY**





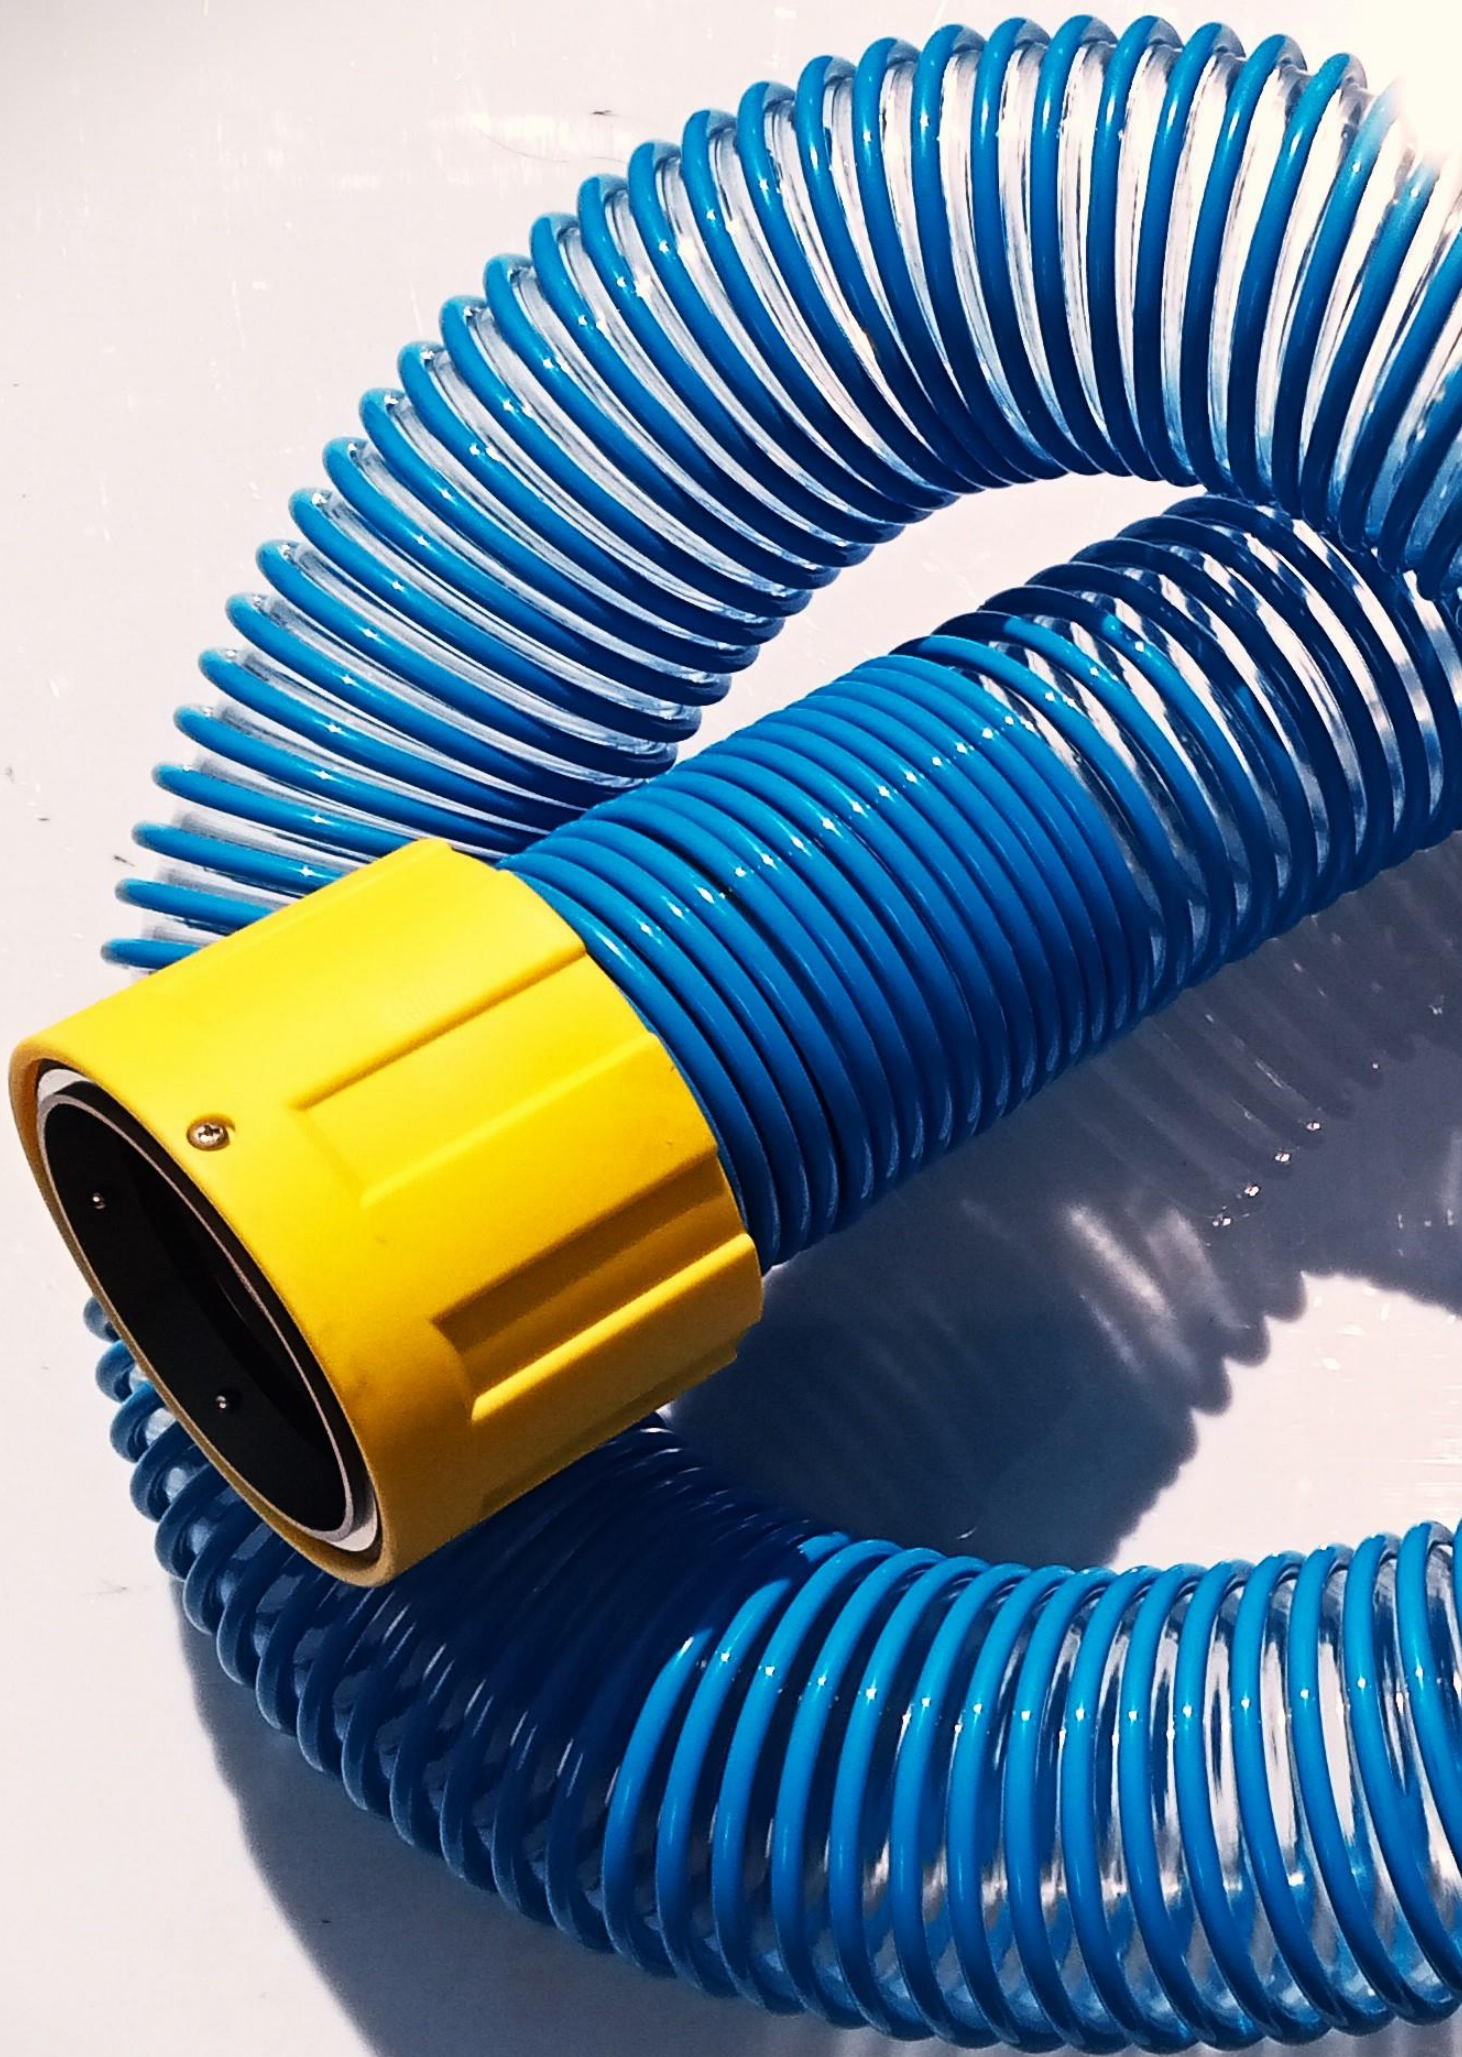





## SCAT | SCEET HOSES



Material meets CS/FAR 25.853(a) DIN EN 45545-2 TO1/EN ISO 4589-2 min HL3



## SCAT HOSES - ADVANTAGES

"SCAT" type ducting has the same type construction as "CAT" except with red silicone rubber impregnation. Out advantages : for use in conducting extremely cold or hot air with temperatures from -80° to over 550°F.

## PROPERTIES

Flexible hoses specially recommended in gas conductions at high temperatures, engine exhaust fume extraction from a point immediately close to the ejection area, electronic units cooling and welding gas aspiration.

Hot air extraction in ceramic kilns.

Airplane or helicopter cockpit heating.

Ventilation and air-conditioning in boats.

Protection of electric cables passing through extremely hot areas.

Sheathing of pipework transporting hot air..

This product is manufactured with one fiber glass reinforcement with high temperature resistance silicone rubber. The inner part is coated with visible steel wire.

## PARTNUMBER

PART NUMBER	
ASH-SC D10	Internal diameter 10 mm
ASH-SC D13	Internal diameter 13 mm
ASH-SC D14	Internal diameter 14 mm
ASH-SC D16	Internal diameter 16 mm
ASH-SC D17	Internal diameter 17 mm
ASH-SC D18	Internal diameter 18 mm
ASH-SC D19	Internal diameter 19 mm
ASH-SC D20	Internal diameter 20 mm
ASH-SC D22	Internal diameter 22 mm
ASH-SC D25	Internal diameter 25 mm
ASH-SC D28	Internal diameter 28 mm
ASH-SC D32	Internal diameter 32 mm
ASH-SC D34	Internal diameter 34 mm



AIRSTARTHOSSES



## SCAT HOSES - ADVANTAGES

"SCAT" type ducting has the same type construction as "CAT" except with red silicone rubber impregnation. Our advantage : For use in conducting extremely cold or hot air with temperatures from -80° to over 550°F.

## PROPERTIES

These kind of flexible hoses are specially recommended in gas conductions at high temperatures, engine exhaust fume extraction from a point immediately close to the ejection area, electronic units cooling and welding gas aspiration.

Hot air extraction in ceramic kilns.

Airplane or helicopter cockpit heating.

Ventilation and air-conditioning in boats.

Protection of electric cables passing through extremely hot areas.

Sheathing of pipework transporting hot air..

This product is manufactured with one fiber glass reinforcement with high temperature resistance silicone rubber. The inner part is coated with visible steel wire.

Optional : anti abrasion cover.

Temperature – 80 to +310€

Straight cut

For non corrosion medium to high temperature gasses.

-0.580 bar to +1.800 bar

Flame retardant

Antistatic, if spiral earthed. 10n6



## SCEET HOSES - ADVANTAGES

Flexible hose made of two layers of fiber glass and silicone coated with a non-visible steel wire inside the hose wall. Applications. Double Ply Silicone Coated Ducting.

## PROPERTIES

"SCEET" type ducting has the same type construction as "CEET" except with red silicone rubber impregnation. For use in conducting extremely cold or hot air with temperatures from -80° to over 550°F.

Highly flexible  
 Easily installed around obstructions and sharp bends  
 Less air friction loss than similar non-lined ducting  
 Ideal for use in extremely cold or hot air, ranging from -80°F to +550°F  
 Good for conveying fumes

## PARTNUMBER

PART NUMBER	
ASH-SCT D10	Internal diameter 10 mm
ASH-SCT D13	Internal diameter 13 mm
ASH-SCT D14	Internal diameter 14 mm
ASH-SCT D16	Internal diameter 16 mm
ASH-SCT D17	Internal diameter 17 mm
ASH-STC D18	Internal diameter 18 mm
ASH-SCT D19	Internal diameter 19 mm
ASH-SCT D20	Internal diameter 20 mm
ASH-SCT D22	Internal diameter 22 mm
ASH-SCT D25	Internal diameter 25 mm
ASH-SCT D28	Internal diameter 28 mm
ASH-SCT D32	Internal diameter 32 mm
ASH-SCT D34	Internal diameter 34 mm



# Self-Sealing Fill Coupling



**Self-Sealing Lavatory Service Fill Coupling & Potable Water Fill Coupling** built from Anodized aluminum to prevent bacteria. Prevent ramp spillage. Save time, coupling wear and fluid. The coupling can be disconnected from the aircraft without shutting off flow to the hose. Upon disconnection of the coupling, the integral poppet automatically closes preventing the pressurized line from discharging blue fluid onto the ramp formulated rubbers to ensure safe use and reliability on the tarmac. 3/4" potable water & 1 inch lav. service fill coupler with long-grip for easy aircraft hookup

Your reliable specialist for GSE hoses and couplings.

**BUILT TO EXCEED THE DEMANDING NEEDS OF THE GLOBAL AVIATION INDUSTRY**  
**CERTIFICATION :** ISO CE

## PROPERTIES :

- Anodized aluminium.
- Reversible.
- Stainless steel bearings
- Spare parts on stock.

Printed copies are uncontrolled, and properties might change without any notification.